



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

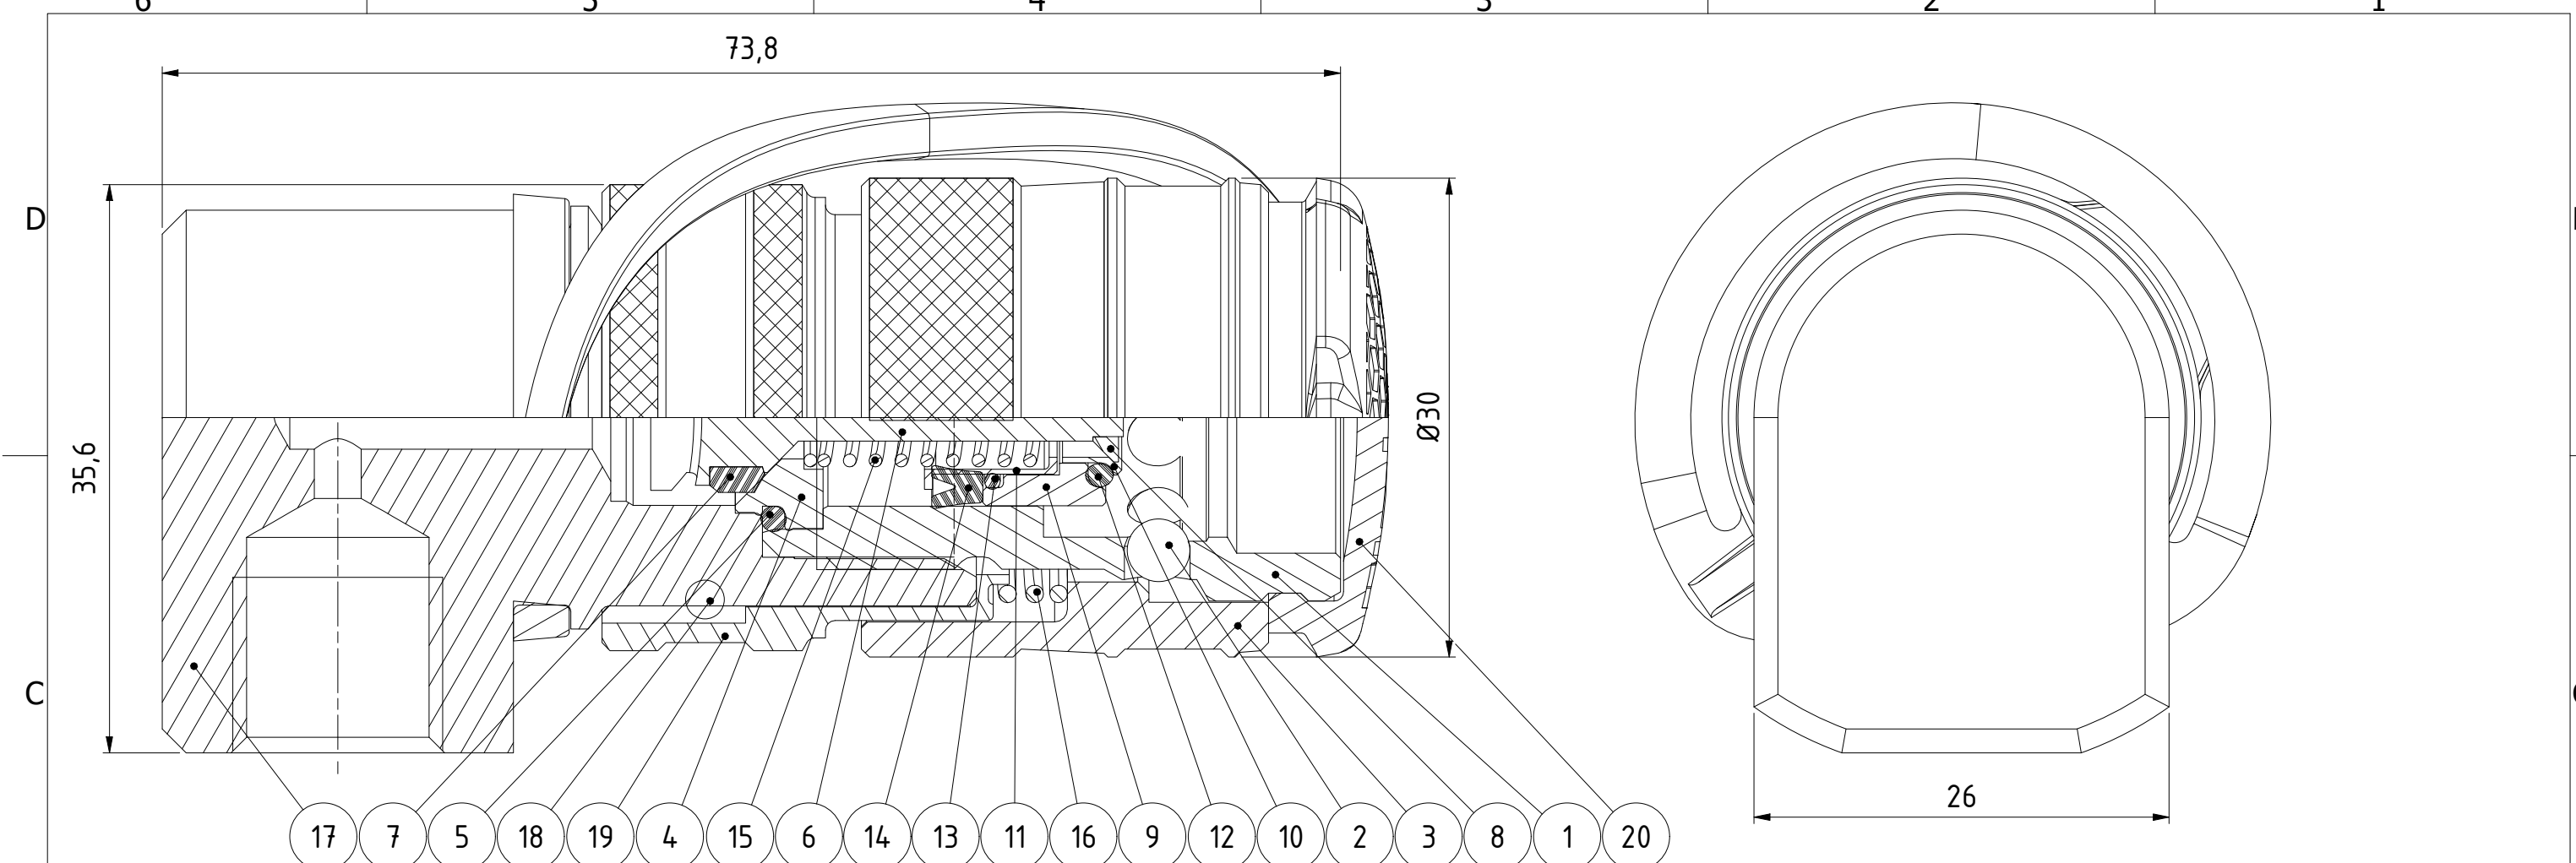

1 : 1

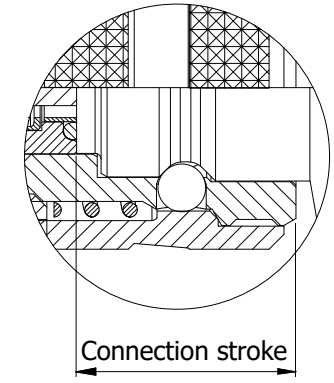

Product No. 101251248	
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	20.2 mm
Max WP Connected:	2500 bar
Max WP Disconnected:	2500 bar
Min BP Connected:	5000 bar
Min BP Disconnected:	5000 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	26

20	1	Dust Cap	TPE, black
19	1	Sleeve	Steel, Zn-Ni 9 transp.
18	2	Ball	Stainless steel
17	1	Back part	Steel, Zn-Ni 10 black
16	1	Spring	Stainless steel
15	1	Spring	Steel
14	1	Lip seal	NBR
13	1	O-ring	NBR
12	1	O-ring	NBR
11	1	Spring housing	Steel
10	1	O-ring sleeve	Steel
9	1	Expansion sleeve	Plastic
8	1	Washer	Steel
7	1	Seal	NBR
6	1	Valve	Steel, FeZn5
5	1	O-ring	NBR
4	1	Valve seat	Steel
3	1	Locking sleeve	Hard.steel,Zn-Ni 9 transp
2	9	Ball	Stainless steel
1	1	Front part	Steel, Zn-Ni 10 black
Item	Qty	Description	Material

Scale5:2

Drawncabao

CheckedFR

Appr.JE

ECO12105

Date2018-06-07

Assembly Drawing501251248

Drawing No.

IssueAC

Sheet1/(1)