
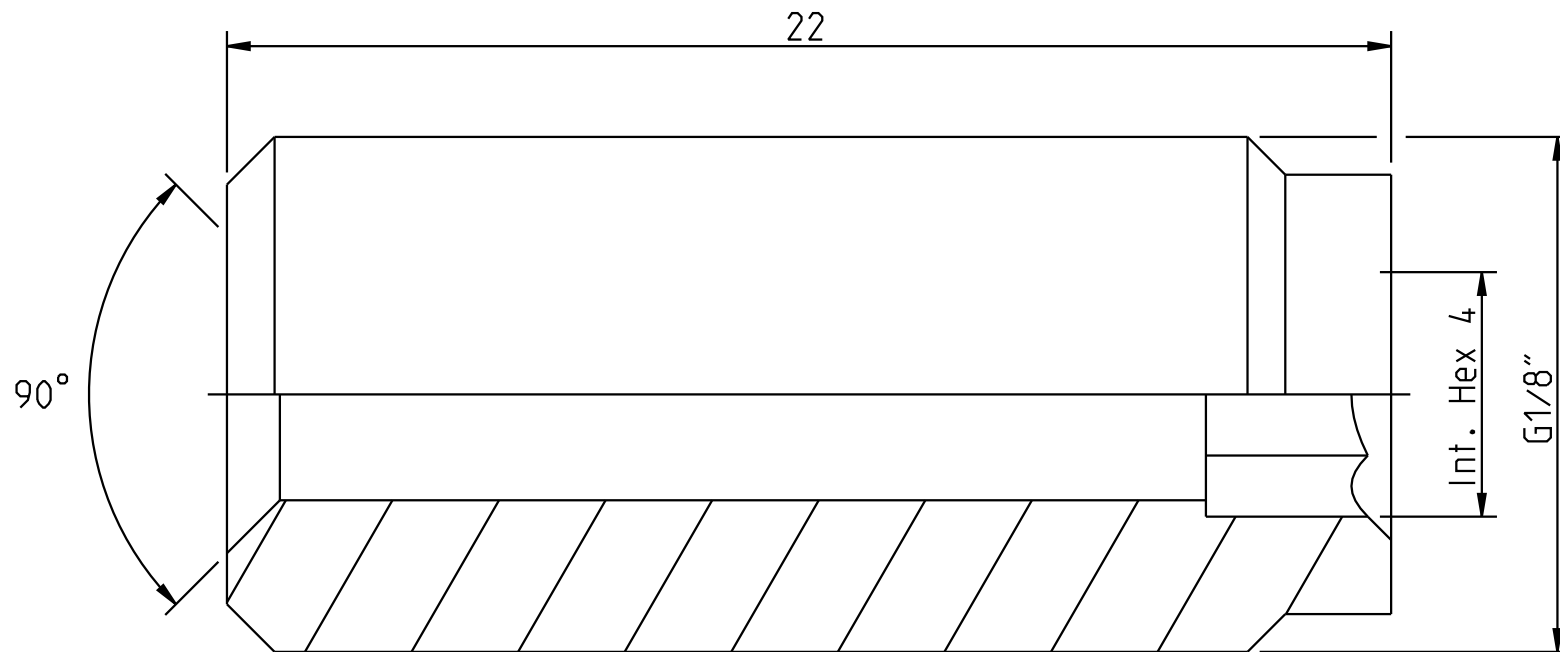


Alle r tigheter f rbeh lls.  
All rights reserved.  
Alle rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr ckliche Genehmigung kopiert oder auf andere Weise vervielf ltigt werden. Werden. Zuwiderhandlungen werden gerichtlich verfolgt.

 vertr kelse h rvid beivras med st d av g llande lag.  
This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences.



Product no: 19\_950\_0016

Max working pressure:	1500 bar connected
	- bar disconnected
Min burst pressure:	2600 bar connected
	- bar disconnected
Sealing material:	
Temperatur range:	�C - �C
Nominal flow diameter, DN:	4.0 mm
Connection	G1/8" Male
Connection stroke:	- mm

1	1	Adaptor	Steel. Zinc chromate plated.
Detalj Item	Antal Quant.	Ben�mning Description	Material Material
Skala Scale	7:1	Ritad Drawn	MJ
Kontr. Checked	JE	Godk. Appr.	RE
M nr. Alt. no.	-	Dat. Date	121003
Ritning nr./Drawing No.		Utg./Issue	
50_950_0016		AA	



Assembly drawing

50\_950\_0016

AA