


Değişken Uçlu Endüstriyel Tork Anahtarları

Industrial Interchangeable Torque Wrenches



- › TS EN ISO 6789 standardına uygun $\pm 3\%$ hassasiyet
- › Seri numaralı izlenebilir tork kalibrasyon sertifikası
- › 2 – 1.000 N.m arası kapasitede farklı tork anahtarları
- › 10.000 torklama işlemi ile kanıtlanmış kalite
- › 9x12 ve 14x18 mm dikdörtgen girişli uçlarla uyumludur
- › Farklı marka tork uçları rahatlıkla kullanılabilir
- › Hassas ve okunaklı mikrometre tip tork ayar skalası
- › Kaymaz tırtıklı sap tasarımı ile ergonomik kullanım
- › DIN ISO 6789 & ASME B107.300-2010 kalite standardı
- › Türkiye’de servis, yedek parça ve servis imkânı

- › Accuracy $\pm 3\%$ according to TS EN ISO 6789
- › Traceable calibration certificate for the clockwise direction
- › Different torque wrenches in the range of 2 to 1.000 N.m
- › 10.000 times torque guarantee without any error
- › Compatible with 9x12 & 14x18 mm rectangular inserts
- › Different brand torque inserts can be used easily
- › Precise, easy-to-read micrometer type torque setting scale
- › Ergonomic shape with non-slip knurled handle design
- › DIN ISO 6789 & ASME B107.300-2010 quality standard
- › Calibration and warranty services in Turkey

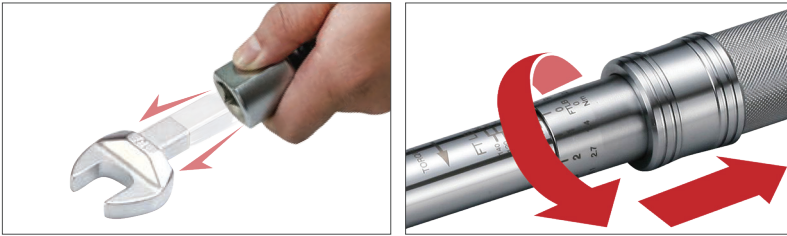

Parça Part	Uç Girişi Input Type	Tork Kapasitesi Torque Range		Ölçek Increment	Uzunluk Length	Ağırlık Weight
No.	N.m	N.m	Lb.ft - Lb.in	N.m	mm	kg
CTI-010P*	9x12	2-10	22-84	0,1	270	0,55
CTI-020P*	9x12	4-20	40-172	0,1	313	0,63
CTI-060	9x12	10-60	9-42	0,5	340	0,80
CTI-100A	9x12	20-100	16-72	0,5	403	0,86
CTI-100B	14x18	20-100	16-72	0,5	425	0,99
CTI-200	14x18	40-200	33-144	1,0	503	1,47
CTI-350	14x18	50-350	44-251	2,0	583	1,62
CTI-400	14x18	80-400	66-288	2,0	583	1,62
CTI-420	14x18	60-420	52-302	2,0	583	1,62
CTI-600	14x18	100-600	92-424	5,0	990	5,60
CTI-800	14x18	150-800	129-572	5,0	1170	5,80
CTI-1000	14x18	200-1.000	166-719	5,0	1170	5,80

* İşaretili modeller plastik tutma koluna sahiptir. / *Marked models have plastic handle.



Uç Seçenekleri / Insert Tool Options

