

# 10 Ton Kapasiteli Hidrolik Flaş Ayırıcılar

## 10 Ton Capacity Hydraulic Flange Spreaders

**POWERRAM**  
HYDRAULIC TOOLS

PFS10T



- › 10 ton kapasiteli hidrolik flaş ayırıcılar
- › Modeline göre harici ya da dahili pompalı
- › Ayak mesafesi 104-216 mm arasında ayarlanabilir
- › 700 barda maksimum ayırma kuvveti üretir
- › Hidrolik sistem tek etkili ve yay dönüşlüdür
- › Bakım, onarım ve devreye alma işleri için ideal
- › Kullanımı basittir, tek kişi tarafından kullanılır
- › Yüksek ayırma kuvveti için ikili set tavsiye edilir
- › Her cihaz güvenlik takozu ile sevk edilmektedir
- › POWERRAM marka, 2 yıl garantili, CE ve ISO belgelidir

- › Hydraulic flange separators with a capacity of 10 tons
- › Depending on the model with external or internal pump
- › Claws distance adjustable from 104 to 216 mm
- › Generates maximum separation force at 700 bar
- › Single acting and spring return hydraulic system
- › Ideal for numerous industrial maintenance & repair jobs
- › Easy, light and very practical to use
- › Suggest to use in sets for an even and higher spreading force
- › Each tool is shipped with safety block
- › 2 year warranty, POWERRAM brand, origin Taiwan

### Tamamlayıcı Ekipmanlar / Optional Equipment

#### El Pompaları / Hand Pumps



#### Hortumlar / Hoses




#### Kaplinler / Quick Couplings



Parça Part	Açıklama Description	Kapasite Capacity	Flaş Kalınlığı Flange Thickness	Saplama Ölçüsü Stud Size	Çene Ölçüsü Wedge	Stroke	Cihaz Ağırlığı Tool Weight
No.	#	Ton	mm	mm	mm	mm	kg
PFS10T	Tek Ayırıcı Single Tool	10	216	31-41	3,3-28,7	51	15
PFS10TBG	Tekli Set Single Set	10	216	31-41	3,3-28,7	51	25,2
PFS10TBG MAX	İkili Set Double Set	10x2	216	31-41	3,3-28,7	51	46,6
PFS10TI	Dahili Pompalı Integrated	10	216	31-41	3,3-28,7	51	17,5

Parça Part	Ölçüler (mm) Dimensions							
No.	A	B	C	F	G	H	I	J
PFS10T	300	108	248	38	124	216	285	31,75
PFS10TBG	300	108	248	38	124	216	285	31,75
PFS10TBG MAX	300	108	248	38	124	216	285	31,75
PFS10TI	300	108	375	38	124	216	285	31,75

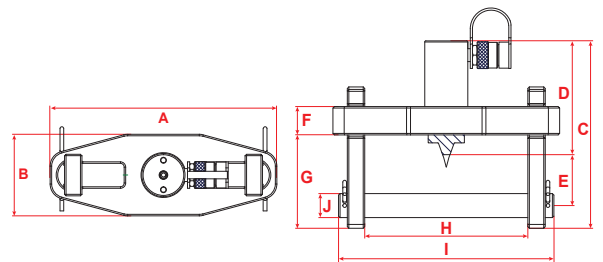

#### PFS10TI



#### PFS10TBG MAX

